



CABINET LIGHTING

VERTICAL
MOUNT SERIES

ELITE LEVEL

Vertical Mount Shelf Lighting

Phantom™ Elite VM Series LED light strips are designed for any linear display or cabinet lighting application and represent a breakthrough in strip lighting technology. These low profile task lights are easily concealed regardless of the cabinet design, giving new definition to the phrase, "See the Light, Not the Fixture."


Custom mounting trims establish the optimum aiming angle which allows the contents of any area to be illuminated to a precise degree at the highest level of aesthetics yet to be seen. Strips are precut to any desired length to be custom fitted in cabinets with fixed or movable shelves. Strips are dimmable using a magnetic low voltage dimmer and produce a quality of consistent color and lumen output unmatched by competing products.

PHANTOM ELITE VM SERIES FEATURES

- Low profile, concealed linear LED lighting source designed for adjustable shelf lighting or adjustable display applications
- Excellent assortment of power connectors, jumpers, and accessories for ease of installation
- Dimmable high-performance compact magnetic low-voltage 24VDC drivers (available in both 120V and 277V)




Elite VM Series Exploded View




SPACE REQUIREMENT

On a cabinet with adjustable shelves, 1" of clearance is required between the back surface of the stile and the front of the shelf. This will provide the space to move shelves without modifying the Phantom fixture.



DUAL FIXTURES

The Phantom fixture can be attached behind both vertical stiles, sending light in each direction.

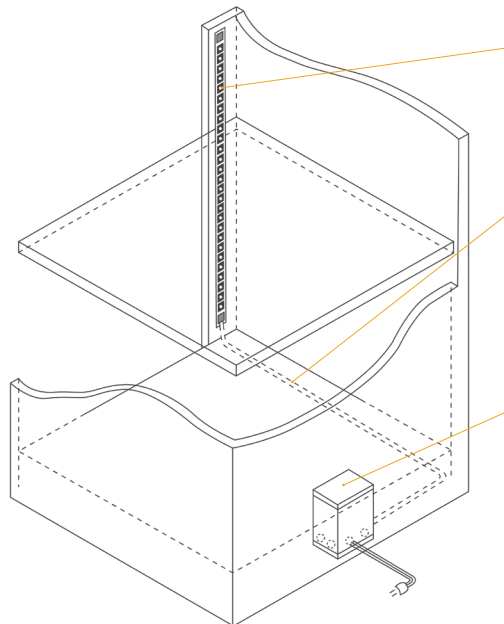

LED LIGHTING STRIP

Each LED lighting strip is concealed by either a trim or a lensed enclosure. For best results, use a matte finish on the back of the cabinet to minimize reflections and/or glare.

CONCEALED WIRING

For fixed shelving, furniture or retrofit applications, it may be necessary to conceal the wiring from individual fixtures back to the transformer. We are happy to manufacture your lighting strips with long leads to accommodate any application. Consult factory for other fixed wiring methods.

DRIVER

Magnetic drivers are sized to match the total wattage of your lighting load and come equipped with one or more secondary circuit breakers. (See driver sheet for more sizing information and amperage calculations).


DIMMER CONTROLS (BY OTHERS)

Magnetic low voltage transformers should always be used with a dimmer designated for magnetic or inductive loads. Electronic transformers should always be used with a dimmer designated for electronic loads.

SHIELDED

Trim Profiles

Shielded options are best for shaping the light in precise patterns and for minimizing hot spots on surrounding surfaces and spill light that may stray outside the display.

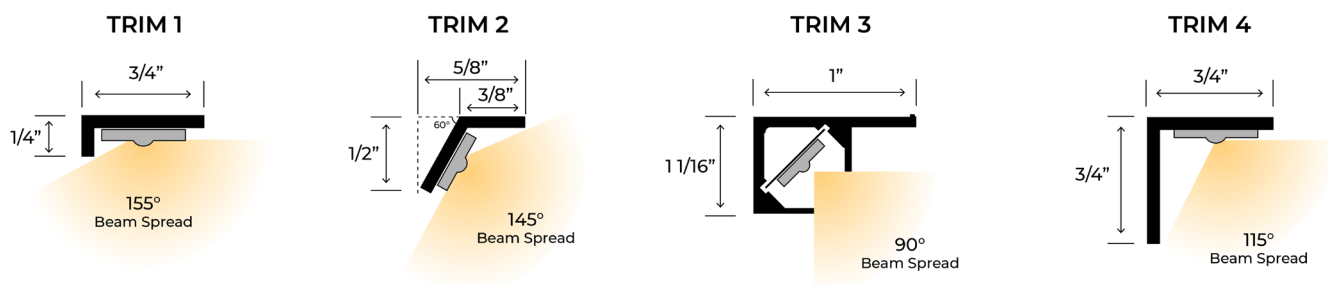

Our most popular shielded trims for vertical mounting method are trims 2 and 3. Both shielded trims are great for applications that have a shelf reveal as they provide the best light distribution and glare control. Trim 3 is perfect for shelves that have no reveal and can be installed and painted to match the cabinet color. For lensed trims, we recommend trim 9 for the ultimate in light distribution to hide the LED diodes and provide total diffusion to prevent reflected glare from displayed objects, reflective or gloss finishes. **See page 3 for lensed trim options.**

ELITE TAPE SPECIFICATIONS FOR SHIELDED TRIM PROFILES

24VDC LED Tape	Wattage	Kelvin Color	Lumens per Foot	Efficacy (LM/W)	CRI	Diodes per Foot	Cut Mark	Max Run Length
	1.8 Economy	1800K	102	57	94+	12	6.00 inches	50 feet
		2100K	131	73				
		2700K	144	80				
		3000K	148	82				
		3500K	158	88				
		4000K	160	89				
	2.2 Standard	1800K	142	64	94+	18	4.00 inches	45 feet
		2100K	161	73				
		2700K	178	81				
		3000K	187	85				
		3500K	194	88				
		4000K	196	89				

Phantom Elite Lighting Strips - Ordering Matrix
Sample Order Number: **VM-ES-1-18-2.2-DL-12-FW-XX**



US ETL LISTED, MISCELLANEOUS FIXTURES,
CONFORMS TO UL STD, 1598


MODEL	SERIES TYPE	TRIM PROFILE	KELVIN COLOR	WATTS/FT	LEAD WIRES*	LEAD LENGTH	TRIM PAINT COLOR	TRIM LENGTH
VM	ES	1	18	2.2	DL	12	FW	XX
VM	ES - Elite Shielded	1	18 - 1800K	1.8 - 1.8W	DL - Double Leads	12"	FW - Flat White	Inches
		2	21 - 2100K	2.2 - 2.2W	BR - Bottom Right	24"	GW - Gloss White	
		3	27 - 2700K		BL - Bottom Left	36"	FB - Flat Black	Specify Your Trim Length In Inches
		4	30 - 3000K		TR - Top Right	48"	GB - Gloss Black	
			35 - 3500K		TL - Top Left	120"	LB - Light Beige	
			40 - 4000K			300"	MB - Medium Brown	
							LA - Light Almond	
							UF - Unfinished	
							CC - Custom Color**	

*When facing application
**Contact factory for details

LENSED

Trim Profiles

Lensed options are the best for applications where the light fixture may be visible, by hiding the individual LED diodes and preventing object or surface reflections by homogenizing the light pattern.

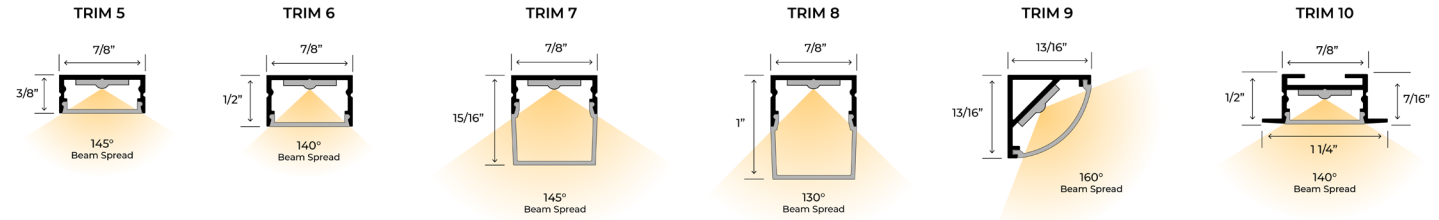

ELITE TAPE SPECIFICATIONS FOR LENSED TRIM PROFILES

24VDC LED Tape	Wattage	Kelvin Color	Lumens per Foot	Efficacy (LM/W)	CRI	Diodes per Foot	Cut Mark	Max Run Length
	1.5 High Density	1800K	129	86	94+	56	1.75 inches	60 feet
		2100K	154	102				
		2700K	179	119				
		3000K	191	127				
		3500K	195	130				
		4000K	197	131				
	2.8 High Density	1800K	235	83	94+	56	1.75 inches	35 feet
		2100K	246	87				
		2700K	273	97				
		3000K	298	106				
		3500K	319	113				
		4000K	303	108				

Phantom Elite Lighting Strips - Ordering Matrix
Sample Order Number: **VM-EL-5-18-2.8-DL-12-SA-XX**



US ETL LISTED, MISCELLANEOUS FIXTURES,
CONFORMS TO UL STD, 1598

MODEL	SERIES TYPE	TRIM PROFILE	KELVIN COLOR	WATTS/FT	LEAD WIRES*	LEAD LENGTH	TRIM PAINT COLOR	TRIM LENGTH
VM	EL	5	18	2.8	DL	12	SA	XX
VM	EL - Elite Lensed	5	18 - 1800K	1.5 - 1.5W	AD - Adjustable	12"	SA - Satin Aluminum	Inches
		6	21 - 2100K	2.8 - 2.8W	DL - Double Leads	24"	CC - Custom Color**	
		7	27 - 2700K		LR - Leads Left	36"		Specify Your Trim Length In Inches
		8	30 - 3000K		LL - Leads Left	48"		
		9	35 - 3500K		BR - Bottom Right	120"		
		10	40 - 4000K		BL - Bottom Left	300"		
					TR - Top Right			
					TL - Top Left			

*When facing application
**Contact factory for details


DRIVER SPECIFICATIONS

	20 VA	40 VA	60 VA	96 VA	150 VA	200 VA	300 VA
120VAC/24VDC	MD20-24	MD40-24	MD60-24	MD96-24	MD150-24	MD200-24	MD300-24
277VAC/24VDC	MD20-24-277	MD40-24-277	MD60-24-277	MD96-24-277	MD150-24-277	MD200-24-277	MD300-24-277
Maximum Load*	16	32	48	77	120	160	240
Minimum Load	10	16	24	38	60	80	120
Circuit Breaker	Auto	Auto	Auto	Auto	Auto	Manual	Manual
Height (H)	5.50"	5.50"	6.50"	6.50"	9.50"	9.80"	9.80"
Width (W)	2.25"	2.25"	2.75"	2.75"	3.25"	3.25"	4.25"
Depth (D)	2.00"	2.00"	2.25"	2.25"	4.00"	3.00"	3.50"
Weight (lbs)	1.80	1.80	2.00	2.00	5.00	5.50	8.75

*These numbers reflect the 20% safety factor that is recommended to avoid overload or nuisance tripping when selecting a transformer. (Wattage x 1.20)

To calculate amperage, divide total wattage by secondary voltage (Wattage/Voltage = Amperage).
To calculate wattage, divide amperage by secondary voltage (Amperage/Voltage = Wattage)

Driver Dimensions

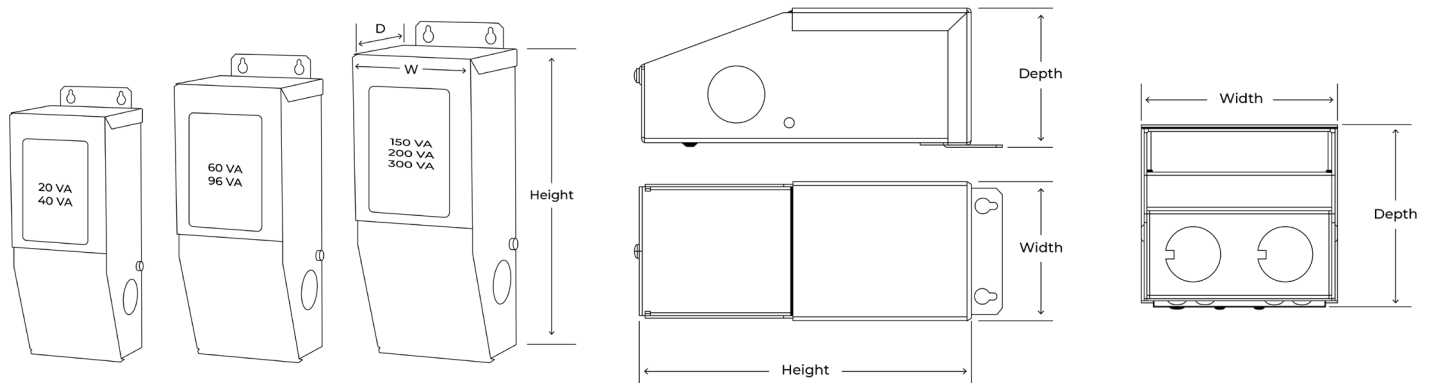

Elite VM Series Load Examples

TERMS AND CONDITIONS

To comply with Phantom™ Lighting System warranty policies and ETL standards, all lighting strips must be used in conjunction with Phantom™ Lighting drivers. All Phantom lighting transformers are ETL Approved for Class 2 applications and are strongly recommended for proper orientation of lighting strips. Phantom™ drivers should **not** be located in areas without ventilation or be subjected to high ambient temperatures. If ambient temperatures exceed 115°F (46°C) around the driver, the circuit breakers may nuisance-trip due to excessive heat and void any warranty.

CAUTION: Failure to correctly size primary and secondary conductors and/or overload protection may result in bodily injury or serious property damage.

If you have any questions or concerns regarding your application, please contact the factory at (713) 863-1184 or consult a licensed electrician or the National Electric Code.